

Resolution 2026-R-153

A Resolution authorizing an agreement with Steel Built Systems, LLC to repair two Storage Buildings at the Irondale Civic Center


THEREFORE BE IT RESOLVED, by the City Council of the City of Irondale, Alabama, in regular meeting duly assembled, a quorum being present, that Mayor James D. Stewart, Jr., or his designee, is hereby authorized to accept a quote from Steel Built Systems, LLC (in substantially the form attached hereto as Exhibit A) in an amount not to exceed \$98,000.00 for the repair of two storage buildings at the Irondale Civic Center and to execute any other documents necessary to effectuate the same.

ADOPTED AND APPROVED: This 6th day of August, 2026.




David Spivey, City Council President

APPROVED:

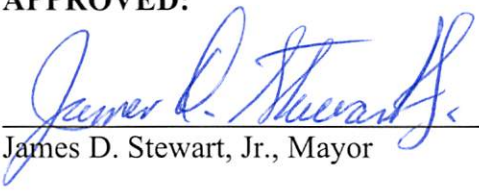

James D. Stewart, Jr., Mayor


ATTESTED:

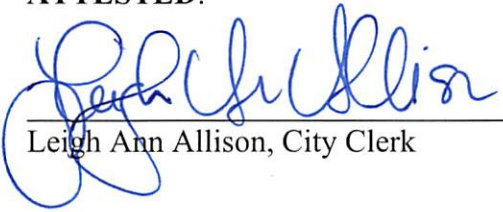

Leigh Ann Allison, City Clerk

CERTIFICATION

I, Leigh Ann Allison, the City Clerk of the City of Irondale, Alabama, hereby certify the above to be a true and correct copy of a resolution adopted by the City Council of the City of Irondale at its regular meeting held on the 6th day of August, 2026, as the same appears in the minutes of record of said meeting.

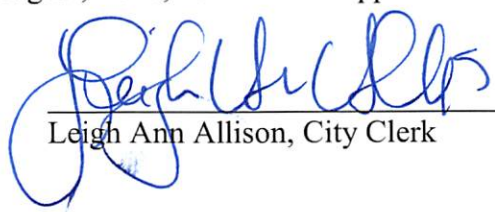

Leigh Ann Allison, City Clerk

EXHIBIT A

STEEL BUILT SYSTEMS, LLC
8631 AL HIGHWAY 22
MAPLESVILLE, AL 36750
334-366-0374
334-366-0375 (FAX)
steelbuilt@bellsouth.net

City of Irondale
Mr. Bead Doss

Metal Building Repair Proposal City of Irondale

6-5-2026

SBS LLC, a licensed general contractor in the State of Alabama proposes to supply and install the following scope of work based upon the attached 6-3-26 metal building evaluation. All material supplied to have a minimum 25-year warranty. All workmanship to have a 2-year warranty. No sales taxes have been included.

50 x 50 x 19 Building Scope:

- Remove and replace 2500 sq ft like kind 26-gauge PBR galvalume roof panels and 3" thick roof insulation.
- Supply and install new like kind rake, gutter, downspouts, eave and high side ridge trims. All trim to be min 26 gauge.
- Supply and install long life screws at all roof plain locations.
- Remove and replace front end wall panels and trim with new like kind material.
- Existing skylights to be removed and NOT replaced.
- Dailey cleanup, proofs of insurances, permits, and business licenses included.

50 x 100 x 16 Building Scope:

- Remove and replace 5000 sq ft like kind 26-gauge PBR galvalume roof panels.
- Supply and install new like kind rake, gutter, downspouts, eave and ridge caps. All trim to be min 26 gauge.
- Supply and install long life screws at all roof plain locations.
- Existing skylights to be removed and NOT replaced.
- Dailey cleanup, proofs of insurances, permits, and business licenses included.

TOTAL MATERIAL and LABOR PRICE: \$ 98,000.00

Proposal based on M-F 6a-6p workdays. Estimated time of completion after material procurement is 30 days. Terms: No deposit required, full payment net 30 upon satisfactory completion.

Respectfully,
WESLEY HICKS

